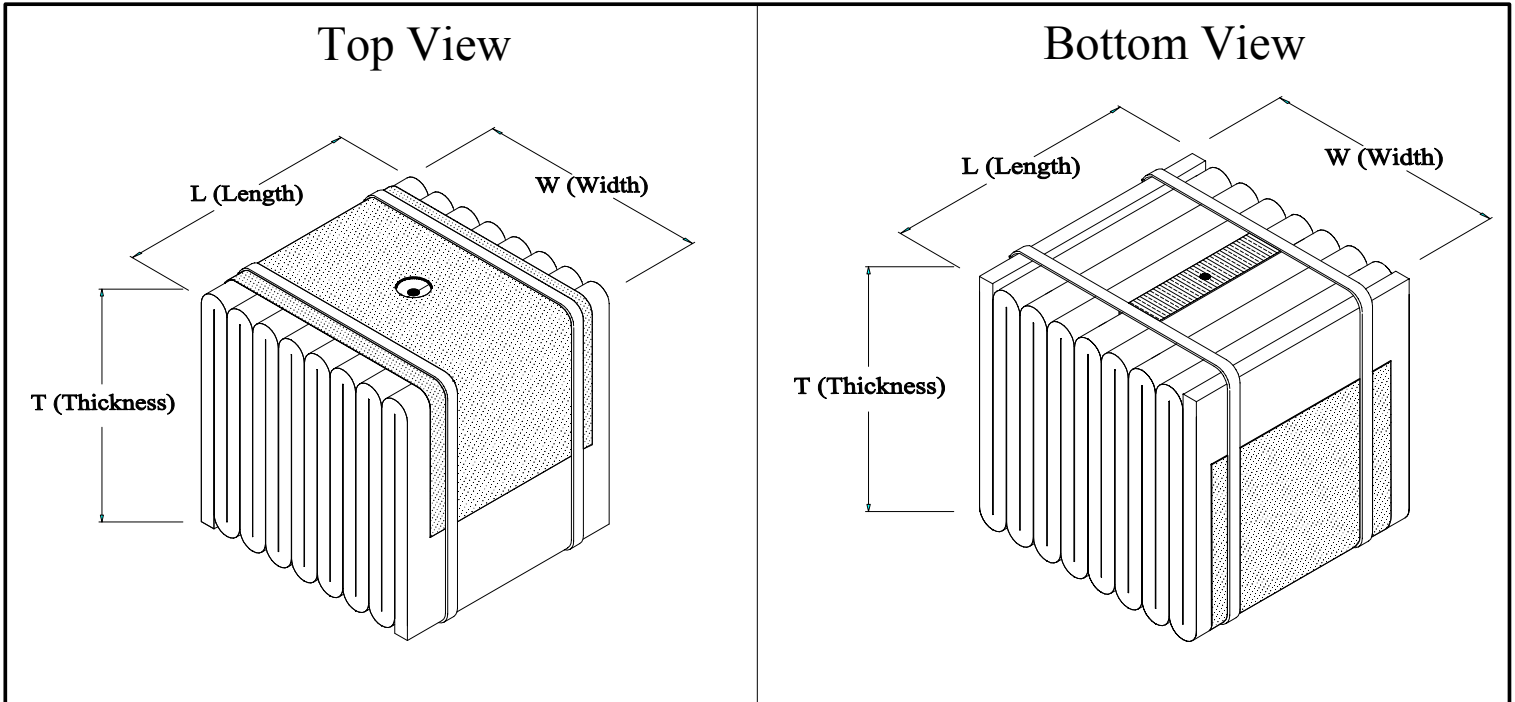


DELTA

DF Module Order Sheet

Office: 281-391-1320
 Fax: 281-391-2015
 Toll Free: 800-430-2226
 DRIsales@deltarefractories.com

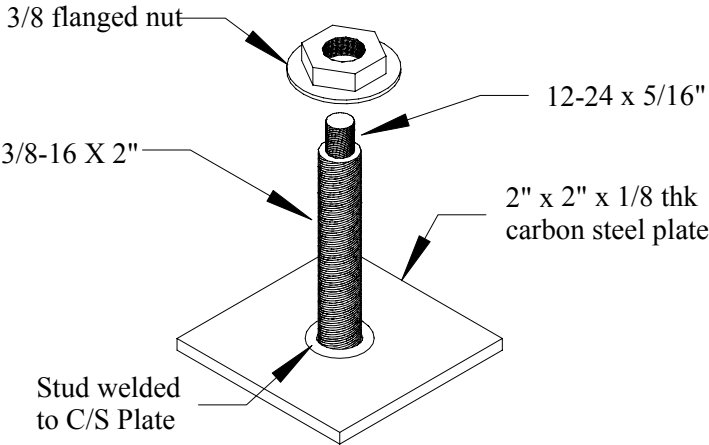
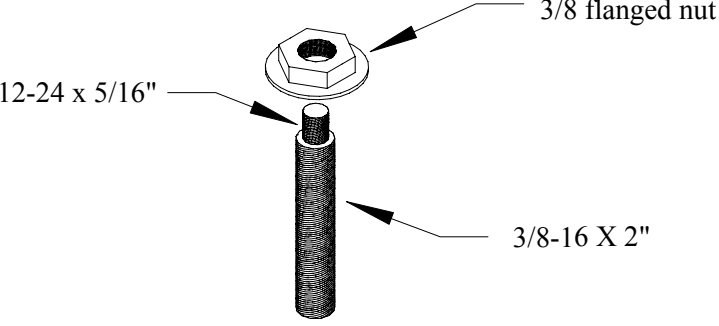
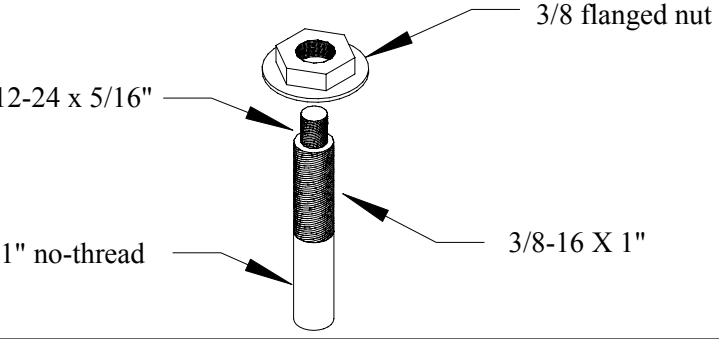
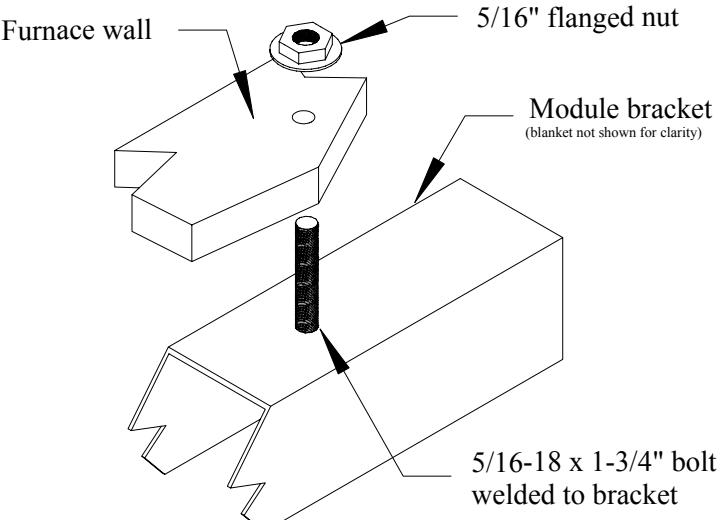


Dimensions L x W x T <i>(Please complete)</i>	Module Density <i>(Please check)</i>
Length _____ Width _____ Thickness _____	<input type="checkbox"/> 8 PCF - 12" W uses 16 layers of 1" 6 lb. blanket <input type="checkbox"/> 10.7 PCF - 12" W uses 16 layers of 1" 8 lb. blanket <i>(PCF = Pounds Per Cubic Foot)</i>

Fiber Grade <i>(Please check)</i>	Attachment Method <i>(Please check)</i>
<input type="checkbox"/> 2300° F <input type="checkbox"/> 2600° F <input type="checkbox"/> 2700° F (Special order) <input type="checkbox"/> Other _____	<input type="checkbox"/> Through Bolt Assembly - 304 SS <input type="checkbox"/> Stud/Nut Assembly for Stud Welding* - 304 SS <input type="checkbox"/> Stud/Nut Assembly - 304 SS - Welded to Plate* (Carbon steel) <input type="checkbox"/> Other _____ <small>* Guide rod required for installation Other grades of steel available upon special request</small>

This drawing and all information is the property of Delta Refractories, Inc. It is confidential and given to you for a limited purpose. Neither this drawing nor any part of this document may be copied, exhibited, or furnished to others without the consent of Delta Refractories, Inc.

Attachment Method for Delta DF Module

Stud/Nut/Plate Assembly	Stud/Nut Assembly
 <p>3/8 flanged nut</p> <p>12-24 x 5/16"</p> <p>3/8-16 X 2"</p> <p>2" x 2" x 1/8 thk carbon steel plate</p> <p>Stud welded to C/S Plate</p>	 <p>3/8 flanged nut</p> <p>12-24 x 5/16"</p> <p>3/8-16 X 2"</p> <p>3/8-16 x 2-3/8" BW - OAL 12-24 x 5/16" Ext. - 304 stainless steel Flanged Nut - 3/8" diameter - 304 stainless steel</p> <p>Guide rod required for installation</p>
<p>3/8-16 x 2-3/8" BW - OAL 12-24 x 5/16" Ext. - 304 stainless steel welded to carbon steel plate Flanged Nut - 3/8" diameter - 304 stainless steel</p> <p>Guide rod required for installation</p>	<p>Same as above but non threaded 1"</p>  <p>3/8 flanged nut</p> <p>12-24 x 5/16"</p> <p>1" no-thread</p> <p>3/8-16 X 1"</p>
 <p>Furnace wall</p> <p>5/16" flanged nut</p> <p>Module bracket (blanket not shown for clarity)</p> <p>5/16-18 x 1-3/4" bolt welded to bracket</p>	<h2 style="text-align: center;">Through-Bolt Assembly</h2> <p style="text-align: center;">5/16-18 x 1-3/4" 304 stainless steel bolt welded to bracket between fiber & channel Flanged Nut - 5/16" diameter - 304 stainless steel</p>

This drawing and all information is the property of Delta Refractories, Inc. It is confidential and given to you for a limited purpose. Neither this drawing nor any part of this document may be copied, exhibited, or furnished to others without the consent of Delta Refractories, Inc.